

# Optibor® Boric Acids



Orthoboric Acid

Boric Acid

Technical Grade: Granular, Powder, Extra Fine Powder

National Formulary (NF): Granular and Powder

Special Quality (SQ): Granular

European Pharmacopeia (EP): Granular and Powder

High Purity (HP)

CAS/TSCA Number 10043-35-3

Optibor® boric acids are a pure, multifunctional source of boric oxide ( $B_2O_3$ ). Apart from borax pentahydrate, they are the most widely used industrial borate.

Optibor boric acids ( $B_2O_3$ ) are theoretically composed of boric oxide and water. Crystalline in composition, white in appearance, they can be used as granules or as a powder. Both forms are stable under normal conditions, free-flowing, and easily handled by means of air or mechanical conveying. In solution, they are mildly acidic.

## Applications and benefits

Glass type	Thermal Expansion	Melting Temperature	Melting Rate	Glass Viscosity	Surface Tension	Chemical Resistance
Textile Fiber Glass (E Glass)		X	X	X	X	
Borosilicate Glass	X	X	X	X		X
Glazes and Enamels	X	X	X	X	X	X

### Glasses and fiber glass

$B_2O_3$  is both a flux and a network former; it assists the melt and influences the final product properties. In fiber glass, for example, it reduces melting temperatures and helps the fiberizing process. Generally,  $B_2O_3$  lowers viscosity, controls thermal expansion, inhibits devitrification, increases durability and chemical resistance, and reduces susceptibility to mechanical or thermal shock.

Optibor boric acids may be used in combination with a sodium borate (borax pentahydrate or anhydrous borax) in order to adjust the sodium to boron ratio in glasses which require low sodium levels. This is important in borosilicate glass where  $B_2O_3$  provides essential fluxing properties at low sodium and high alumina levels.

### Frits, glazes, and enamels

For the glassy surfaces of ceramics and enamels boric oxide acts as both network former and flux. It initiates glass formation (at low temperatures), ensures 'thermal fit' between glaze and body, reduces viscosity and surface tension, increases refractive index, enhances strength, durability and scratch resistance, and facilitates lead-free formulations. High boron frits mature rapidly, improve the speed at which smooth, even glaze surfaces develop, and provide good bases for coloring oxides.

# Optibor® Boric Acids



*Optibor* boric acids are used as the B<sub>2</sub>O<sub>3</sub> source in the formulation of fast fire frits for tiles because of their requirement for low sodium levels.

### Flame retardancy

Incorporated into cellulose materials, borates change the oxidation reactions and promote the formation of 'char', thereby inhibiting combustion. *Optibor* boric acids, alone or in combination with borax, are particularly effective in reducing the flammability of cellulose insulation, wood composites, and the cotton batting used in mattresses.

### Metallurgy

*Optibor* boric acids prevent the oxidation of metal surfaces in welding, brazing, or soldering. They are also used as a source of boron for strengthening metal alloys and steel.

### Corrosion inhibition

*Optibor* boric acids are incorporated in many aqueous and non-aqueous systems requiring corrosion inhibition, lubrication or thermal oxidative stabilization. *Optibor* boric acids find use in the manufacture of lubricants, brake fluids, metalworking fluids, water treatment chemicals, and fuel additives.

### Adhesives

As part of the starch adhesive formulation for corrugated paper and paperboard, and as a peptizing agent in the manufacture of casein-based and dextrin-based adhesives, *Optibor* boric acids greatly improve the tack and green strength of the adhesive by crosslinking conjugated hydroxyl groups.

### Personal care products

EP and NF grade *Optibor* boric acid finds applications in cosmetics, toiletries and pharmaceuticals. It is used in conjunction with sodium borates for pH buffering, and as a crosslinking agent to emulsify waxes and other paraffins.

### Nuclear energy

Being a highly effective absorber of thermal neutrons, the boron-10 isotope is essential to the safety and control systems of nuclear power stations. *Optibor* SQ and HP boric acid is made for the nuclear industry, and can be isotopically enriched to increase the available proportion of boron-10.

### Chemical reactions

In the manufacturing of nylon intermediates, *Optibor* boric acids catalyzes the oxidation of hydrocarbons and increases the yield of alcohols by forming esters that prevent further oxidation of hydroxyl groups to ketones and carboxylic acids.


They are also used in preparing various important industrial products such as boron halides, borohydride, fluoborates, metallic borates, borate esters, and boron containing ceramics.

### Some other applications

- Dye stabilization
- Electroplating
- Electrolytic capacitors
- Leather processing and finishing
- Sand-casting (magnesium)
- Textile finishing
- Paints

# Optibor® Boric Acids

Effect of B<sub>2</sub>O<sub>3</sub> on glass expansion

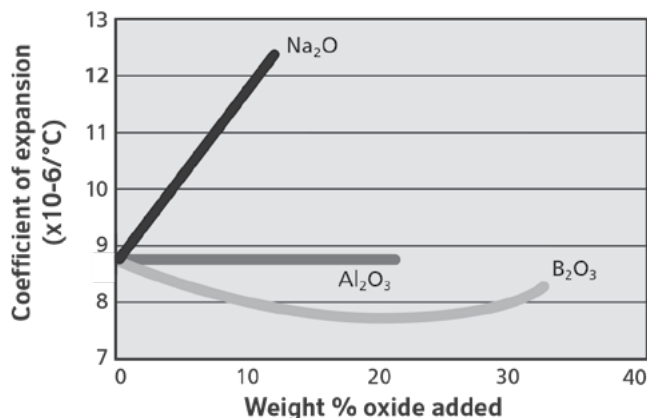

Reduction in linear coefficient of expansion in glass when silica is replaced proportionately by boric acid. This facilitates “thermal fit” in ceramic glazes and heat resistance in borosilicate glass. Source: *Glass* by Horst Scholze 1991

## Chemical and physical properties

When heated above 100°C (212°F) in the open, *Optibor* boric acids gradually lose water first changing to metaboric acid, HBO<sub>2</sub>, of which three monotropic forms exist. These have melting points respectively of 176°C (348.8°F), 201°C (393.8°F), and 236°C (456.8°F). Dehydration stops at the composition HBO<sub>2</sub> unless the time of heating is extended or the temperature raised above 150°C (302°F). On continued heating and at higher temperatures all water is removed leaving the anhydrous oxide, B<sub>2</sub>O<sub>3</sub>, the crystalline form of which melts at 450°C (842°F). The amorphous form has no definite melting point, softening at about 325°C (617°F) and becoming fully fluid at about 500°C (932°F).

### Stability

*Optibor* boric acids are a stable crystalline product that does not change chemically under normal storage conditions. Wide fluctuations in temperature and humidity can cause recrystallisation at particle contact points, resulting in caking. Care should therefore be taken to avoid such fluctuations during storage of the product. Also, it is, of course, essential to maintain the integrity of the packaging.

# Optibor® Boric Acids

## Characteristics

Molecular Weight	61.83
Specific Gravity	1.50
Melting Point	171°C (340°F)
Heat of Solution (absorbed) @18°C	3.64x10 <sup>5</sup> J/kg (110.5 BTU/lb)

## Theoretical chemical composition

B <sub>2</sub> O <sub>3</sub>	56.30%
H <sub>2</sub> O	43.70%

## Solubility in water

Temperature °C (°F)	Boric acid % by weight in saturated solution
0 (32)	2.52
5 (42)	2.98
10 (50)	3.49
15 (59)	4.08
20 (68)	4.72
25 (77)	5.46
30 (86)	6.23
35 (95)	7.12
40 (104)	8.08
45 (113)	9.12
50 (122)	10.27
55 (131)	11.55
60 (140)	12.97
65 (149)	14.42
70 (158)	15.75
75 (167)	17.41
80 (176)	19.10
85 (185)	21.01
90 (194)	23.27
95 (203)	25.22
100 (212)	27.53
103.3 (217.9)*	29.27

\*Boiling point of solution

# Optibor® Boric Acids

## Solubility in other solvents

Organic solvent	Temp °C (°F)	Boric acid % by weight in saturated solution
Glycerol (98.5%)	20 (68)	19.90
Propylene glycol	20 (68)	21.10
Ethylene glycol	25 (77)	18.50
Diethylene glycol	25 (77)	13.60
Ethyl acetate	25 (77)	1.50
Acetone	25 (77)	0.60
Glacial acetic acid	30 (86)	6.30
Methanol	25 (77)	21.96
Ethanol	25 (77)	11.96
1-Propanol	25 (77)	7.40
1-Butanol	25 (77)	5.28
2-Methyl-1-butanol	25 (77)	4.33

## Hydrogen ion concentration

Aqueous solutions of *Optibor* boric acids are mildly acidic, the pH decreasing with increasing concentration.

%H <sub>3</sub> BO <sub>3</sub> by weight of solution	pH @ 20°C (68°F)
0.1	6.1
0.5	5.6
1.0	5.1
2.0	4.5
3.0	4.2
4.0	3.9
4.72 (saturated)	3.7

**Notice:** Before using these products, please read the Product Specifications, the Safety Data Sheets and any other applicable product literature. The descriptions of potential uses for these products are provided only by way of example. The products are not intended or recommended for any unlawful or prohibited use including, without limitation, any use that would constitute infringement of any applicable patents. Nor is it intended or recommended that the products be used for any described purposes without verification by the user of the products' safety and efficacy for such purposes, as well as ensuring compliance with all applicable laws, regulations and registration requirements. Suggestions for use of these products are based on data believed to be reliable. The seller shall have no liability resulting from misuse of the products and provides no guarantee, whether expressed or implied, as to the results obtained if the products are not used in accordance with directions or safe practices. The buyer assumes all responsibility, including any injury or damage, resulting from misuse of the product, whether used alone or in combination with other materials. THE SELLER MAKES NO EXPRESS OR IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THE SELLER SHALL HAVE NO LIABILITY FOR CONSEQUENTIAL DAMAGES.