

Firebrake[®] ZB in polyolefins



Firebrake[®] ZB is used as a flame retardant, smoke suppressant, and afterglow suppressant in both halogen-free and halogen-containing polyolefin, including wire and cable products, electrical parts, appliance components, wall covering, foam insulation, mechanical parts, and roofing membrane.

Firebrake ZB has a typical median particle size of 9 microns. To enhance fire performance and achieve the best physical properties, *Firebrake* ZB is also offered in a fine grade (*Firebrake* ZB Fine) with a typical particle size of 2.3 microns.

Halogen-free polyolefins

- Reduction in the rate of heat release (see Figure 1)
- Smoke suppressant
- Reduction of carbon monoxide generation
- Afterglow suppressant
- Improvement of mechanical properties (except tensile strength)
- Improvement of electrical properties (dielectric constant, anti-arcing function)
- Improvement of processability in metal hydroxide-containing systems
- Promotion of a strong char/ceramic residue in conjunction with metal hydroxides due to its sintering aid functionality, which can be further augmented with the use of co-additives such as silicone/ silica, phosphate ester, melamine polyphosphate, ammonium polyphosphate, or red phosphorous

Halogen-containing polyolefins

- Synergy with antimony oxide in fire test performance such as in the limiting oxygen index (LOI - see Figure 2), UL 94, or wire and cable vertical burn tests
- Partial replacement of 25-50% of antimony trioxide in most polyolefin formulations to provide cost savings
- Smoke suppressant
- Promotion of char formation
- Afterglow suppressant due to its borate moiety
- Reduction of HCl and HBr in combustion off-gases
- Improvement of aged elongation properties

Figure 1: Improvement in HRR due to addition of *Firebrake* ZB Fine to MDH or ATH in an EVA formulation


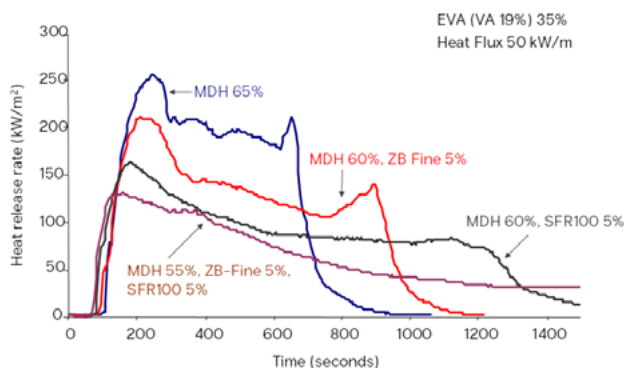


Figure 2: Improvement in LOI of cross-linked EVA due to synergistic effect of *Firebrake* ZB and antimony oxide

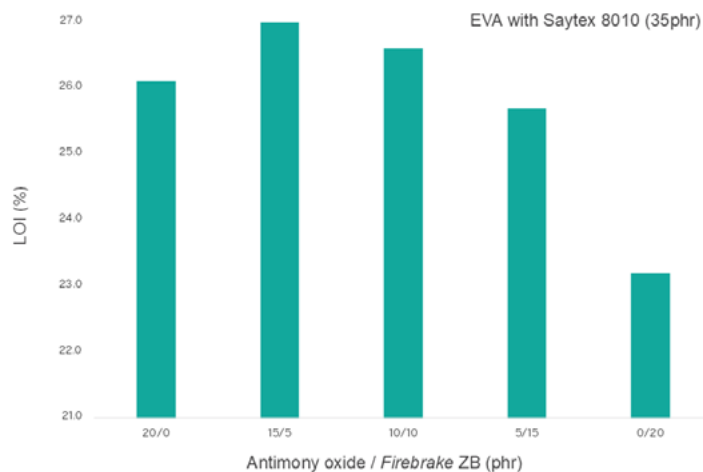

BROCHURE: FIREBRAKE ZB IN POLYOLEFINS

General guidelines

Recommendations for levels of treatment depend on the desired fire test performance, the need for halogen-containing or halogen-free formulations, and the presence of other co-additives.

In a halogen-containing polyolefin, a good starting-point is the replacement of 30 to 50 wt% of antimony trioxide with *Firebrake ZB* in an existing formulation. If this results in equal or improved fire test performance, a higher antimony oxide replacement level can be tried.

The beneficial interaction in terms of fire test performance can be augmented by using alumina trihydrate (ATH), magnesium hydroxide (MDH), talc, or wollastonite.

About U.S. Borax

U.S. Borax is a global leader in the supply and science of borates—naturally-occurring minerals containing boron and other elements. We are 1,000 people serving our customers with more than 1,200 delivery locations globally. We supply around 30% of the world's need for refined borates from our world-class mine in Boron, California, about 100 miles northeast of Los Angeles.

About 20 Mule Team products

U.S. Borax produces the *20 Mule Team*® borates family of products from naturally occurring minerals and have an excellent reputation for purity and safety when used as directed. Borates are key ingredients in a number of industrial applications including fiberglass, glass, ceramics, batteries and capacitors, wood preservatives, and flame retardants.

High quality, high reliability, high performance borate products. It's what we're known for.



borax.com